


# 230 REC - HYDRAULIQUES SEULES

Nouveauté

TYPE	DIMENSIONS en mm							Code	Prix HT Hydraulique seule
	DN	A	B	Ø	Kg	Moteur	kW		
230 REC 200/1	6"	1 532	625	250	123	6"	22.00	J2C13006	2 861
230 REC 200/2 DR 20	6"	1 842	805	250	156	6"	30.00	J2C13007	3 537
230 REC 200/2 DR 10	6"	1 848	805	250	228	8"	37.00	J2C13008	3 537
230 REC 200/2	6"	1 928	805	250	246	8"	44.00	J2C13009	3 537
230 REC 200/3 DR 10	6"	2 218	985	250	287	8"	55.00	J2C13010	4 279
230 REC 200/3	6"	2 288	985	250	301	8"	66.00	J2C13011	4 279
230 REC 220/2 DR 20	6"	2 146	805	250	228	8"	37.00	J2C13002	3 499
230 REC 220/2	6"	1 928	805	250	246	8"	44.00	J2C13001	3 499
230 REC 220/3 DR 20	6"	2 218	985	250	287	8"	55.00	J2C13003	4 197
230 REC 220/3 DR 10	6"	2 288	985	250	301	8"	66.00	J2C13004	4 197
230 REC 220/3	6"	2 368	985	250	317	8"	75.00	J2C13005	4 197
230 REC 240/2 DR 20	6"	1 928	805	250	246	8"	44.00	J2C13012	3 475
230 REC 240/2	6"	2 038	805	250	268	8"	55.00	J2C13013	3 475
230 REC 240/3 DR 20	6"	2 288	985	250	301	8"	66.00	J2C13014	4 166
230 REC 240/3 DR 10	6"	2 368	985	250	317	8"	75.00	J2C13015	4 166

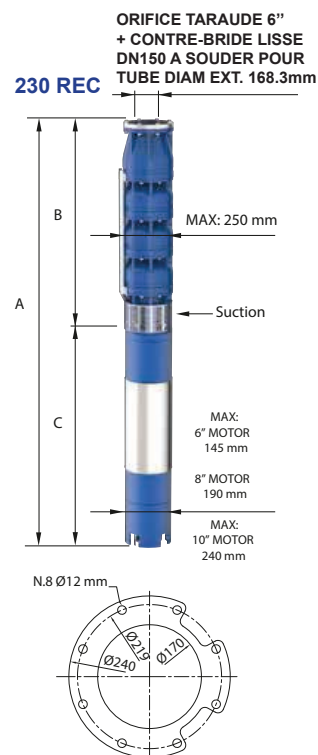


Poids de l'électropompe complète.

## MOTEURS 8"

AVEC ACCOUPLEMENT SELON NORME «NEMA»

**PANELLI**  
italian excellence since 1906

P (kW)	Code	Prix HT €	Butée (N)	In (A)	cos φ	h2 (mm)	Poids (kg)	n = 2 900 tr/min - IP68 - classe F - S1
<b>MOTEURS PANELLI 8" TRI 400V/50Hz (avec connecteur lg. 5 m)</b>								
P850 - 37.00 kW	J7A10004	7 118	45 000	73	0.86	1 043	160	<p><b>Moteur</b> <b>à bain d'eau</b> <b>«P8»</b></p> <ul style="list-style-type: none"> <li>• Chemise inox AISI 304</li> <li>• Palier fonte G25</li> <li>• Arbre inox AISI 431</li> <li>• Immersion maxi : 150 m</li> <li>• T°C maxi : 30°C</li> </ul> 
P860 - 44.00 kW	J7A10001	7 623	45 000	86.3	0.86	1 123	178	
P875 - 55.00 kW	J7A10005	8 225	45 000	106.2	0.87	1 233	200	
P890 - 66.00 kW	J7A10002	9 905	45 000	126	0.87	1 302	214	
P8100 - 75.00 kW	J7A10006	10 305	45 000	143.2	0.87	1 383	230	

► Attention : nous consulter pour délai.